

# SLIM ARRAY SERIES

## 120V Exterior Flood Lights

The Slim Array is an ultra slim and compact area light with a locking swivel adjustment perfect for up-lighting, exterior corridors, landscape lighting, eaves, and side yards. Available in three fixture sizes delivering up to 3150 lumen output performance and comes standard with three selectable color temperature settings.

- Selectable 3-CCT: 3000K / 4000K / 5000K
- Available in three array size options (Small, Medium, Large)
- Up to 3150 lumens, consuming only 45 watts (ARS45)
- Die-cast aluminum housing
- Surface mount and soil mount stake installation capable
- Adjustable knuckle for directing light
- Includes removable/adjustable visor for shielding purposes
- Suitable for use in outdoor wet locations
- 35,000 hours rated life



### SLIM ARRAY SERIES QUICK SPECS

<b>VOLTAGE</b>	100-277V AC
<b>WATTAGE</b>	15W / 30W / 45W
<b>LUMENS</b>	Up to 3150Lm
<b>CCT OPTIONS</b>	Selectable 3-CCT 3000K / 4000K / 5000K
<b>CRI</b>	90+
<b>BEAM ANGLE</b>	105° x 80°
<b>DIMMING</b>	Non-Dimmable
<b>MOUNTING</b>	Surface Mount / Soil Mount (requires ARS-SMS)
<b>OPERATING TEMP</b>	-10°C (14°F) to 50°C (122°F)
<b>CERTIFICATIONS</b>	cETLus Listed - Wet Location
<b>RATED LIFE</b>	35,000 Hours

PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



### SLIM ARRAY SERIES ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION	FINISH	VOLTAGE	CCT	CRI	LUMENS	WATTAGE	DIMMING
ARS15-3CCT-BK	ARS15	Black	100-277V AC	3-CCT	90+	Up to 1050Lm	15W	Non-Dimmable
ARS30-3CCT-BK	ARS30	Black	100-277V AC	3-CCT	90+	Up to 2100Lm	30W	Non-Dimmable
ARS45-3CCT-BK	ARS45	Black	100-277V AC	3-CCT	90+	Up to 3150Lm	45W	Non-Dimmable


### SLIM ARRAY SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
ARS-SMS	Soil Mounting Stake (image coming soon)


**SLIM ARRAY SERIES QUICK DIMENSIONS**

ARS15


2.75" (70mm)



5.28" (134mm)




6" (154mm)




2.87" (73mm)

ARS30


3" (76mm)

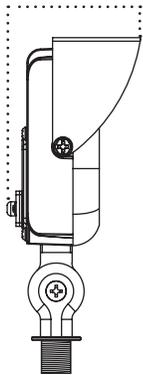

7.64" (194mm)

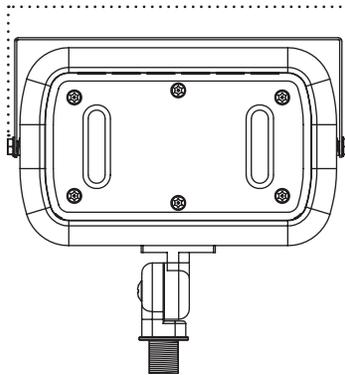


7.5" (190mm)

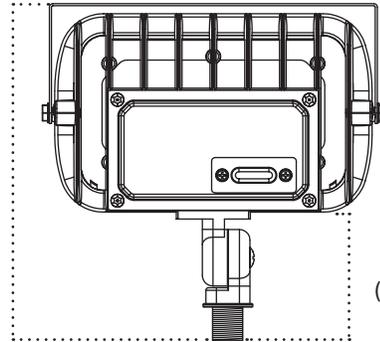


2.87" (73mm)

ARS45


3.46" (88mm)

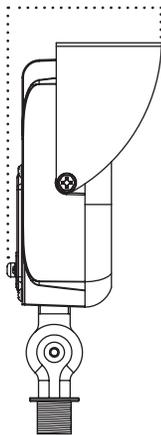

8.8" (223mm)

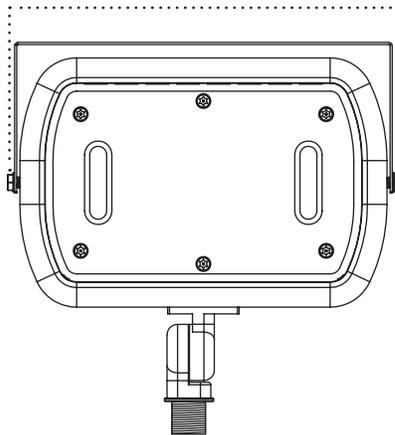

8.8" (223mm)

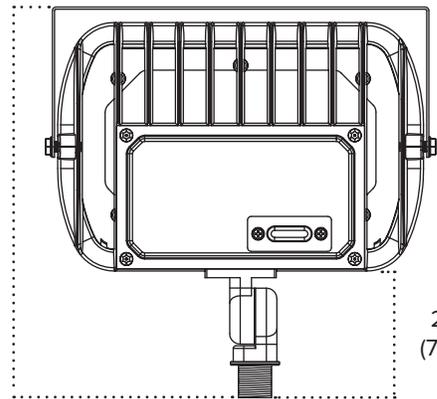

2.87" (73mm)