

# Assembly Instruction Sheet #S-1137W10 For Style 1137W10


**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (2) G9 G9W Maximum (Not Included).  
**Estimated Assembly Time:** 16-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

## ⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

## Package Contents

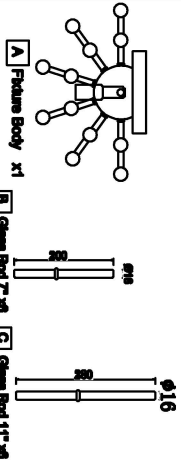

## Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Cap nut	2 per
BB	Wire nut	2 per
CC	Outlet Box	2 per
DD	Mounting Screw	2 per
EE	Mounting bracket	2 per
FF	Backplate	2 per

**STEP 1 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket.**  
 A. Line up a set of holes on the Mounting bracket (EE) and Holes on the Backplate. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and Thread Lock Nuts onto the Mounting Screws (DD). Hand tighten until snug.




Figure 1

**STEP 2 - Attach Mounting bracket to Outlet Box**  
 A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw feeding you. Secure it with Outlet Box Screws. Tighten until snug.




Figure 2

**STEP 3 - Fit Backplate to Mounting bracket Assembly**  
 A. Fit the backplate to Mounting Screws (DD) and secure with Cap nut (AA). Note: The backplate should fit snug against the ceiling and the Cap nut (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the backplate is secure, remove the Cap nut (AA) and proceed to Step 4




Figure 3

**STEP 4 - Wire Connections**  
 A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connector with approved electrical tape and carefully seal all the connected wires into the Outlet Box.

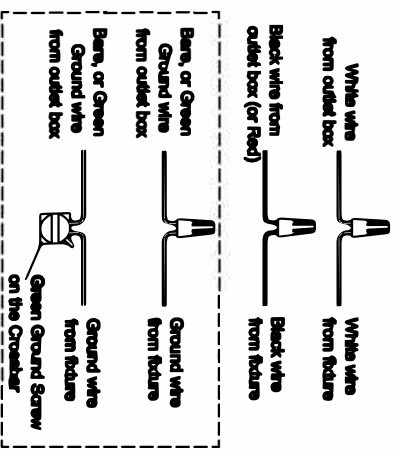


Figure 4

**STEP 5 - Install Backplate to Ceiling**  
 A. Carefully tuck all wires into the outlet box and position the backplate in the fixture Body (A) over the outlet box. Align the holes in the backplate with the Mounting Screws (DD). Secure with Cap nut (AA) and hand tighten until snug.




Figure 5

**STEP 6 - Install bulb and Glass Rod**  
 A. Install bulb (Not Included) onto sockets and push string into place.  
 B. Please put the Glass Rod to the Fixture Body (A).

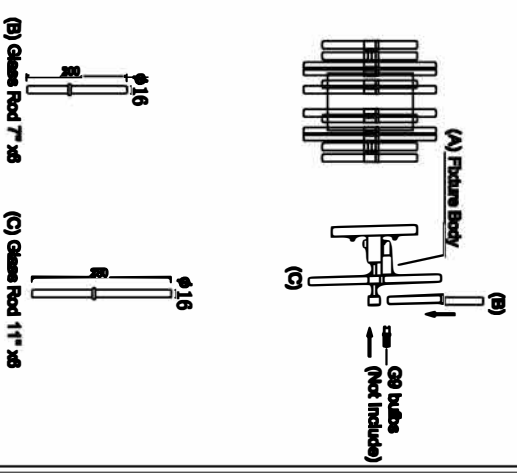


Figure 6