

STMR SERIES TAPE LIGHT

24V Standard Grade Max Run

For large scale projects, the Max Run series provides a more convenient installation by minimizing drivers and connections. Max Run tape is a great tool for lighting coves, corridors, lobbies, and retail spaces featuring a max run length up to 65 feet and available in 2700K, 3000K, and 4000K popular color temperatures.

- Achieve longer max runs perfect for larger installations
- Available in 2700K, 3000K, and 4000K
- Excellent color rendering (90+ CRI)
- Up to 108-112 lumens per foot performance
- Consuming up to 1.46 watts per foot
- Max run lengths up to 65.6 feet and cuttable every 1.97"
- IP54 rating featuring nano-coating protective layer
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life



PROJECT:

TYPE:


LOCATION:

CATALOG NUMBER:



STMR SERIES QUICK SPECS	
VOLTAGE	24V DC
WATTAGE	1.47W / ft
LUMENS	Up to 112Lm / ft
CCT	2700K / 3000K / 4000K
CRI	90+
MAX RUN	65.6ft
CUTTING POINTS	1.97" (50mm)
IP RATING	IP54 - Coated
DIMMING	TRIAC / ELV (5-100%)
DIMENSIONS	10mm (0.39") W x 2mm (0.08") H
BEAM ANGLE	120°
OPERATING TEMP	5°C (41°F) to 70°C (158°F)
CERTIFICATIONS	cULus Listed - Dry / Damp Location
RATED LIFE	50,000 Hours

STMR SERIES IP RATINGS



**IP54 (Coated)**  
Features a light nano-coating applied to the tape light and LED's that protects from moisture and dust.  
**Best suited:** Indoor dry & damp locations

STMR SERIES QUICK LOOK


3528 (90+ CRI) LEDs

0.33" LED Spacing

Cuttable every 1.97"

IP54 Rating

10mm (0.39") Wide



65.6ft Max Run

STMR SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
STMR-27-65	24V	2700K	65.6 ft	108Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft
STMR-30-65	24V	3000K	65.6 ft	110Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft
STMR-40-65	24V	4000K	65.6 ft	112Lm / ft	1.47W / ft	IP54	90+	1.97" (50mm)	65.6 ft

65.6ft Reels (IP54) Include: Attached 3ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) TL-2PWR-HD

STMR SERIES ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed (IP54)
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100ft (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
LVSB-2PIN	In-Line Splice Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway (White)



TL-CONKIT



TL-BLKS



TL-2PWR-HD



TL-2JUMP6-HD  
TL-2JUMP24-HD




TL-2SPL-HD



WIRE-15-2PIN



WIRE-CMP-100-3PIN



INLINE-SC-CTRL




LVSB-2PIN



RCWY-PVC-1M

STMR SERIES QUICK SET-UP

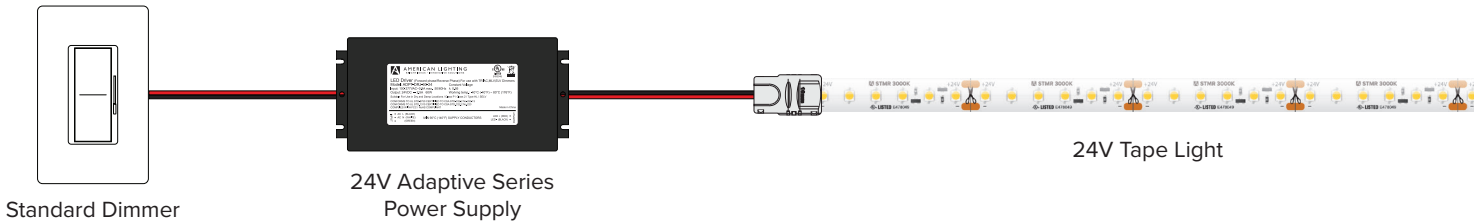

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.85"L x 4.25"W x 1.8"H

\*Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers\*