For Residential and Commercial Applications					
Job Name		Engineer / Architect			
Job Location		Wholesaler			
Submittal Date		Contractor			

## PLB101/114X 1/4 Turn Push Connect Angle Stop - Compression Outlet

*Use:* For use only in potable water distribution systems, hot and cold, in accessible locations only

## Part Listing:

PLB101X B	1/2" nom push connect x 3/8" OD compression, chrome plated, bulk
PLB101X P	1/2" nom push connect x 3/8" OD compression, chrome plated, bagged
PLB114X P	1/2" nom push connect x 1/4" OD compression, chrome plated, bagged





STOP MATERIAL SPECIFICATIONS				
Body	Brass, plated			
Stem	Brass			
Ball	Brass, plated			
Gripper Ring	Stainless steel			
Push Ring	POM			
Seat Ring	POM			
Lock Ring	POM			
Seats	PTFE			
O-Rings	Rubber			
Handle	ABS, plated			
Screw	Stainless steel			
Compression Nut	Brass, plated			
Compression Ring	Brass			
Tube Stiffener	Plastic			
Adapter	Brass, plated			

Operating Specifications				
Temperature	Pressure			
Intermittent 40°- 140° F	125 PSI maximum			

## PLB101/114X 1/4 Turn Push Connect Angle Stop - Compression Outlet

PART DIMENSIONS (Inches)						
Model	DIM. A	DIM. B	DIM. C			
PLB101X	1.12	2.48	.94			
PLB114X	1.12	2.36	.94			



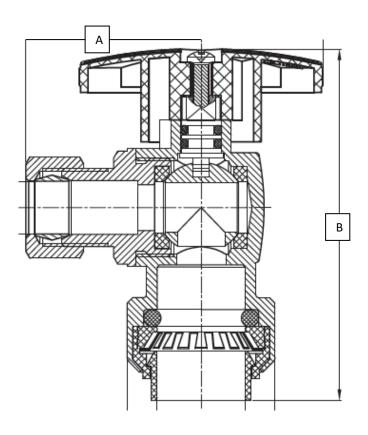

## **Listings & Certifications:**

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF61)



