For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose provides added durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection




Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.450" ID (0.660" OD)


CONNECTOR MATERIAL SPECIFICATIONS			
Inner Hose	Reinforced PVC		
Braiding	PVC coated yarn		
Barb	Brass		
Ferrule	Stainless steel		
Nut	Brass, plated or polypropylene		
Washer	Rubber		



Part Listing:

BL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length, flag labeled
BL12-48WA P	3/4" female hose thread x 3/4" female hose thread x 48" length, bagged
BL12-60WA B	3/4" female hose thread x 3/4" female hose thread x 60" length, bulk
BL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length, flag labeled
BL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged
BL12-60WA P2	3/4" female hose thread x 3/4" female hose thread x 60" length, 2 per bag
BL12-72WA B	3/4" female hose thread x 3/4" female hose thread x 72" length, bulk
BL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length, flag labeled
BL12-72WA P	3/4" female hose thread x 3/4" female hose thread x 72" length, bagged

BL12-**WA Speedi Plumb® PLUS Braided Washing Machine Connector – Female Hose Thread

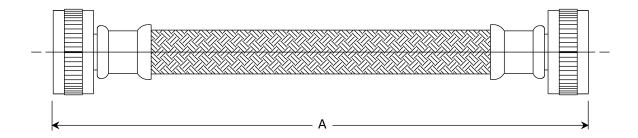

PART DIMENSIONS (Inches)			
Model	DIM. A		
BL12-48WA	48.0 / 49.0		
BL12-60WA	60.0 / 61.0		
BL12-72WA	72.0 / 73.0		

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF 372 for Low-Lead Compliance
- IAPMO listed to NSF 61/9





This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

