

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

BCSSD 3/8" ID (1/2" OD) Black Coated Gas Appliance Connectors

Use: For use with indoor and outdoor connections of gas appliances to gas piping system. May be used with natural, manufactured, mixed and liquefied petroleum (LP or propane) gases and LP gas-air mixtures.

Design Features:

- **Virtually invisible connection.** Black coating is ideal for gas log fireplaces and decorative hearths where you want to see the fire, not the gas piping
- **Superior corrosion resistance** to harsh chemicals found in most common household cleaning, plumbing repair, and masonry products when compared with uncoated gas connectors
- **UV rays and salt resistant,** ProCoat® connectors are certified for indoor and outdoor use
- **Strong and flexible** with greater depth and number of corrugations to withstand greater torque & bend cycles
- **Meets industry standards for torsion** without compromising the integrity of the coating or connector
- **Meets industry standard for repeated bending** without compromising the integrity of the coating or connector
- **One-piece construction** has no soldered or brazed joints
- **Smoother, burnished flare** on connector ends seal with less torque
- **Uniform coat over entire length of connector** for complete corrosion resistance of the stainless steel core
- **100% leak tested**



Operating Specifications:

Temperature: -40° to 150° F

Pressure: standard line pressures up to 1/2 PSI maximum

CONNECTOR FLOW CAPACITY (Straight Length)					
	12"	18"	24"	30"	36"
BTU per Hour (NG)	102,000	93,100	85,000	77,100	71,100
BTU per Hour (LPG)	163,200	148,960	136,000	123,360	113,760
Watts per Hour (NG)	29,893	27,285	24,911	22,596	20,837

CONNECTOR MATERIAL SPECIFICATIONS	
Tubing	<i>Stainless steel</i>
Coating	<i>Polymer blend</i>
Nuts	<i>Steel, plated</i>
Fittings	<i>Steel, plated</i>

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BCSSD 3/8" ID (1/2" OD) Black Coated Gas Appliance Connectors

Part Listing:


Connectors with Fittings

- BCSSD44-12 3/8" ID (1/2" OD) with 1/2" MIP x 1/2" MIP fittings x 12" length
- BCSSD44-18 3/8" ID (1/2" OD) with 1/2" MIP x 1/2" MIP fittings x 18" length
- BCSSD44-24 3/8" ID (1/2" OD) with 1/2" MIP x 1/2" MIP fittings x 24" length
- BCSSD44-30 3/8" ID (1/2" OD) with 1/2" MIP x 1/2" MIP fittings x 30" length
- BCSSD47-12 3/8" ID (1/2" OD) with 1/2" MIP x 3/8" MIP fittings x 12" length
- BCSSD47-18 3/8" ID (1/2" OD) with 1/2" MIP x 3/8" MIP fittings x 18" length
- BCSSD47-24 3/8" ID (1/2" OD) with 1/2" MIP x 3/8" MIP fittings x 24" length
- BCSSD47-30 3/8" ID (1/2" OD) with 1/2" MIP x 3/8" MIP fittings x 30" length
- BCSSD77-12 3/8" ID (1/2" OD) with 3/8" MIP x 3/8" MIP fittings x 12" length
- BCSSD77-24 3/8" ID (1/2" OD) with 3/8" MIP x 3/8" MIP fittings x 24" length
- BCSSD54-12 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" MIP fittings x 12" length
- BCSSD54-18 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" MIP fittings x 18" length
- BCSSD54-24 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" MIP fittings x 24" length
- BCSSD54-30 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" MIP fittings x 30" length
- BCSSD54-36 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" MIP fittings x 36" length
- BCSSD55-12 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" FIP fittings x 12" length
- BCSSD55-24 3/8" ID (1/2" OD) with 1/2" FIP x 1/2" FIP fittings x 24" length

Connectors with Fitting & Gas Ball Valve

- BCSSD4K-24 3/8" ID (1/2" OD) with 1/2" MIP fitting x 1/2" FIP ball valve x 24" length
- BCSSD5K-18 3/8" ID (1/2" OD) with 1/2" FIP fitting x 1/2" FIP ball valve x 18" length

BCSSD 3/8" ID (1/2" OD) Black Coated Gas Appliance Connectors

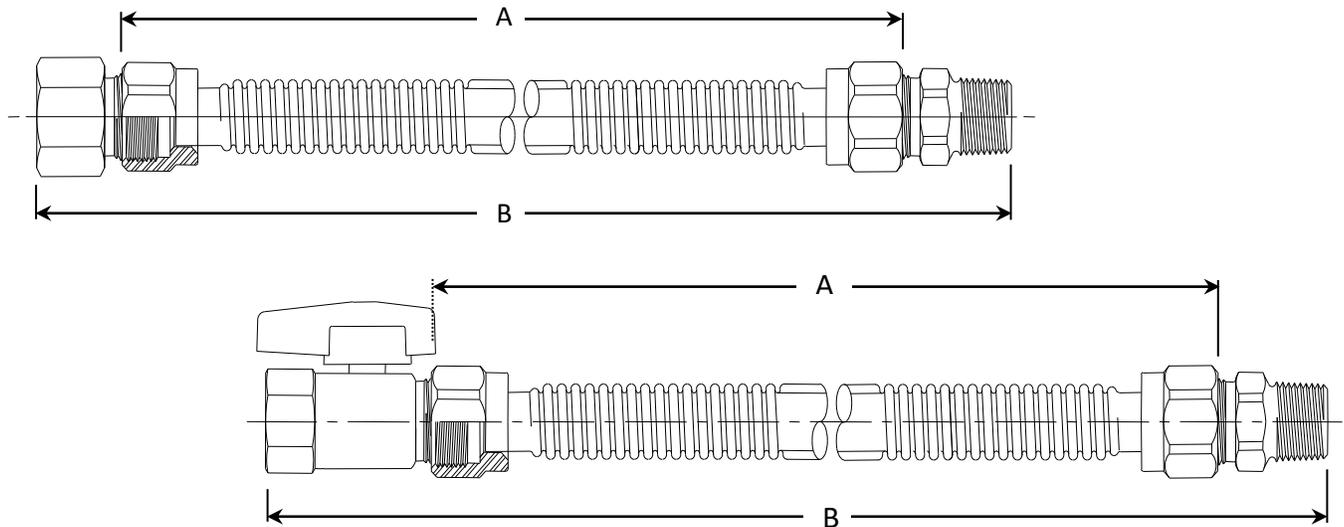

PART DIMENSIONS (Inches)						
Connector Length – Nut by Nut						
Model	DIM.	12"	18"	24"	30"	36"
BCSSD	A	10.10 / 10.85	16.10 / 16.85	22.10 / 22.85	28.10 / 29.35	34.10 / 35.35

PART DIMENSIONS (Inches)						
Connector Lengths – with Fittings						
Model	DIM.	12"	18"	24"	30"	36"
BCSSD44	B	12.74 / 13.49	18.74 / 19.49	24.74 / 25.49	30.74 / 31.99	----
BCSSD47	B	12.70 / 13.45	18.70 / 19.45	24.70 / 25.45	30.70 / 31.95	----
BCSSD55	B	12.10 / 12.85	18.10 / 18.85	24.10 / 24.85	30.10 / 31.35	----
BCSSD54	B	12.42 / 13.17	18.42 / 19.17	24.42 / 25.17	30.42 / 31.67	36.42 / 37.67
BCSSD77	B	12.36 / 13.11	18.36 / 19.11	24.36 / 25.11	30.36 / 31.61	----
Connector Lengths – with Fitting & Gas Ball Valves						
BCSSD4K	B	13.38 / 14.13	19.38 / 20.13	25.38 / 26.13	31.38 / 32.63	----
BCSSD5K	B	13.06 / 13.81	19.06 / 19.81	25.06 / 25.81	31.06 / 32.31	----

Listings & Certifications:

- CSA listed to ANSI Z21.24 / CSA 6.10 standard
"Connectors for Gas Appliances"
- CSA listed to ANSI Z21.75 / CSA 6.27 standard
"Connectors for Outdoor Gas Appliances & Manufactured Homes"



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

