

Assembly Instruction Sheet #IS-1034 P16 For Style 1034P16

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (9) G8 MAAV40W (Not Included).
Estimated Assembly Time: 10-20 minutes.
Preparation: Identify and label all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, test, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.


Package Contents

- B Middle Rod
- B1 4"±2pcs
- B2 6"±1pcs
- B3 12"±9pcs
- A Fixture Body x1
- E Ceiling Canopy x1
- G Slim Rods x53PCS
- 140
- D Slim Rods x53PCS

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
CC	Outlet Box Screw	2pcs

STEP 1 - Release Mounting Bracket from Ceiling Canopy.

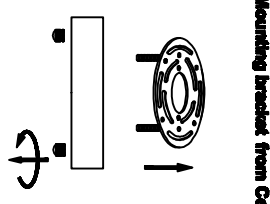

STEP 2 - Install Rods to Fixture Body.

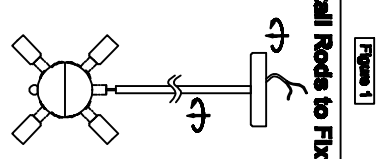


Figure 1


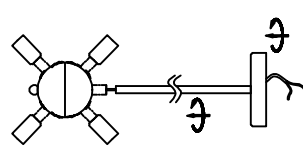


Figure 2

STEP 3 - Attach Mounting Bracket to Outlet Box

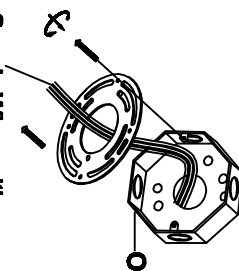

Supply Wires with Outlet Box Screws Ground Wire

Figure 3

STEP 5 - Install Ceiling Canopy to Ceiling

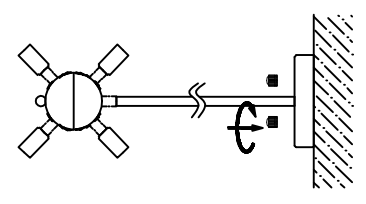


Figure 5

STEP 4 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

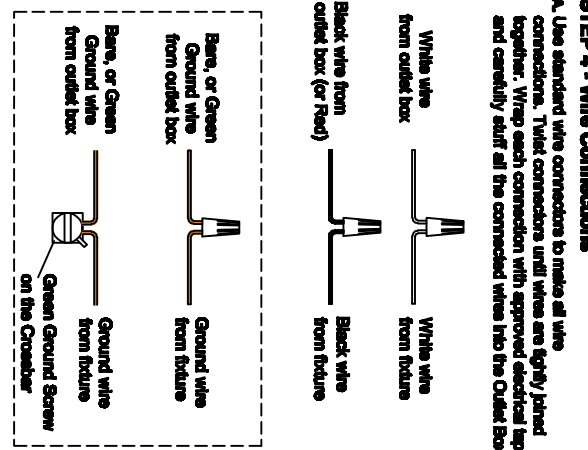


Figure 4

STEP 6 - Install Slim Rods and Bulbs.

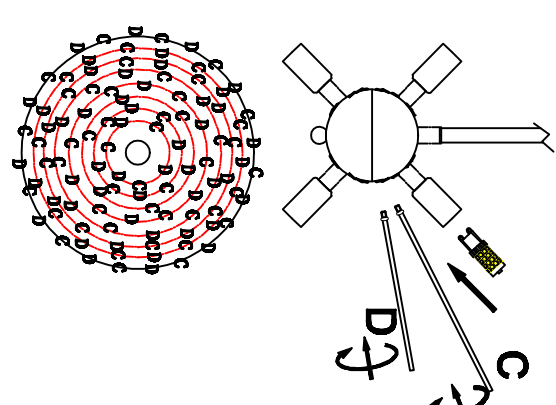


Figure 6