











Assembly Instruction Sheet #S-112P32-12

For Style 112P32-12

Tools Required: Fished screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (12) E12 Candlestyle Base Bulbs 60W Medium (Not Included).
Estimated Assembly Time: 20-30 minutes
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

-  A Fixture Body *1
-  B Fixture Body B *1
-  C Crystal Holder *1
-  D Nipple 10" *4
-  E Nipple 13" *4
-  F Nipple 7" *1
-  H Crystal 22" *16
-  I Crystal 22" *31
-  J Crystal 22" *106
-  K Crystal 22" *106


Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Canopy Lock Ring	1 pcs
BB	Wire nut	3 pcs
CC	Canopy Chain Loop	1 pcs
DD	Crossbar	1 pcs
EE	Outlet Box Screw	2 pcs




STEP 1 - Assemble the Fixture Body

- A. Fix the (F) Nipple with the Loop on the Fixture Body (A)
- B. Pull the electricity wire from the (B) Fixture Body, pull the electricity wire which comes from (F) Nipple.
- C. Fix the other end of (F) Nipple with the coupling on the Fixture Body B, tighten them together. Connect the wires together! (Pay attention to the wire negative with negative, positive with positive.)
- D. Use the screw to fix the (D) Nipple one end with the cross rod on Fixture Body A and the other end lock with the coupling of Fixture Body B.
- E. Use the screw to lock one end of Nipple E with the cross rod on Fixture Body A and the other end lock with the (C) Crystal Holder.

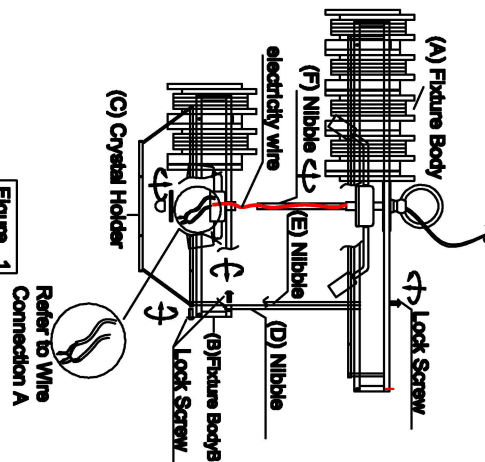


- ### STEP 2 - Install the Canopy Chain Loop and Nipple
- A. Thread the nipple into the crossbar. Thread the lock washer and the hex nut onto top end of the nipple. Do not tighten at the moment.
 - B. Attach the crossbar to the outlet box and secure with outlet box screws (not included). Hand tighten until snug.
 - C. Thread the canopy chain loop onto the end of the nipple and hand tighten until snug. Place the ceiling canopy over the canopy chain loop against the ceiling to determine the correct position of the nipple. Thread the canopy lock ring onto the canopy chain loop. Adjust the nipple to allow the ceiling canopy to rest against the ceiling when held in place by the canopy lock ring.

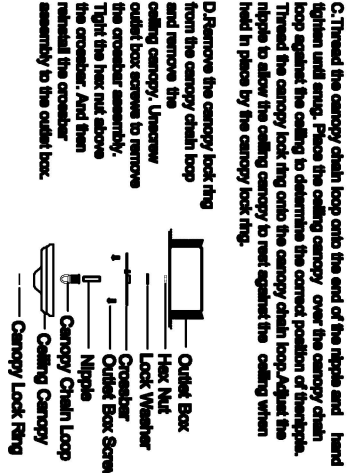


STEP 3 - Install the Fixture Chain and Ceiling Canopy

- A. Adjust the fixture chain to your desired length by removing links if needed.
- B. Pull the supply wires through the fixture chain, pull the supply wires and the ground wire through the canopy lock ring and the ceiling canopy in order.
- C. Attach one end of the fixture chain to the fixture loop with one quick link. Lift the fixture and fixture chain up and attach the other end of the fixture chain onto the canopy chain loop with another quick link. The fixture will now hang steady.
- D. Feed the supply wires and ground wire through the canopy chain loop and nipple into the outlet box. Cut the wires leaving approximately 6" of wire extending from the outlet box.
- E. Go to Step 4 for wire connections and follow the directions.
- F. Return to Step 4 in the step when completed with Step 4.

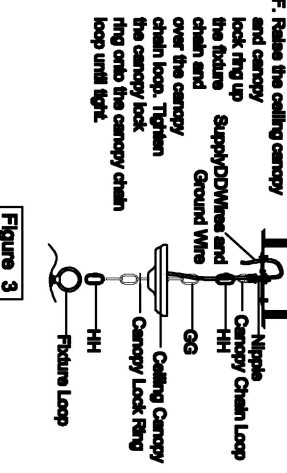

- ### STEP 4 - Wire Connections
- A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

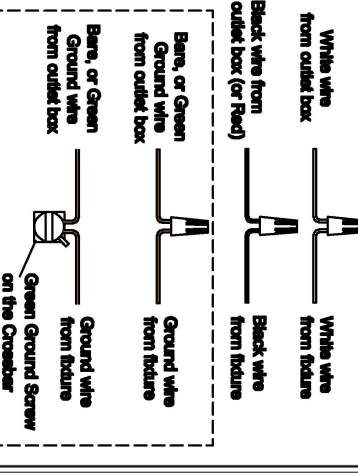

STEP 5 - Install crystals and Bulbs.

- A. Install bulbs onto sockets and push snug into place.
- B. Please put the crystal to the Fixture Body (A).

