


Assembly Instruction Sheet #IS-1203P21 For Style 1203P21

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (2) E12 Candelabra Base Bulbs 60W Maximum (Not Included).
Estimated Assembly Time: 20-30 minutes.
Preparation: Identify and impact all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.


⚠ Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

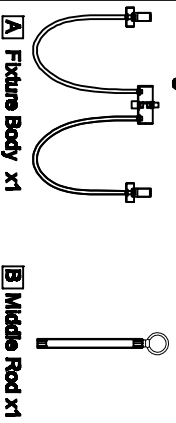

(C) Glass tube x8

PART	DESCRIPTION	QUANTITY
AA	Canopy Lock Ring	1pcs
BB	Wire Nut	3pcs
CC	Canopy Chain Loop	1pcs
DD	Crossbar	1pcs
EE	Outlet Box Screw	2pcs



STEP 1 - Install Middle Rod to Fixture Body
 A. Thread the power cord to the Middle Rods, fix the Middle Rods with the fixture body.
 B. Separate the Arms to let them have the average distance.

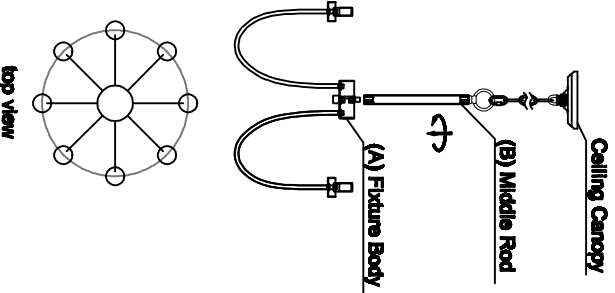


Figure 1

STEP 2 - Install the Canopy Chain Loop and Nipple
 A. Thread the nipple into the outlet box. Thread the lock washer and the bar nut onto top end of the nipple. Do not tighten at this stage.
 B. Adjust the outlet box to the outlet box and secure with outlet box screws (not included). Insert nylon cord end.
 C. Thread the canopy chain loop onto the end of the nipple and hand tighten until snug. Place the supply wires over the canopy chain loop before the ceiling to eliminate the potential of backflow. Thread the canopy lock ring onto remaining wires. Tighten the canopy lock ring to secure the canopy to the ceiling when held in place by the canopy lock ring. Do not tighten the canopy lock ring until the canopy is in place by the canopy lock ring from the canopy chain loop. Remove the ceiling canopy. Remove outlet box screws to remove the outlet assembly. Tighten the bar nut down the screwdriver. And then install the outlet assembly to the outlet box.




Figure 2

STEP 3 - Install the Fixture Chain and Ceiling Canopy
 A. Adjust the fixture chain to your desired length by removing links if needed.
 B. Pull the supply wires through the fixture chain attaching links. After the wires are through the fixture chain, pull the supply wires and the ground wire through the canopy lock ring and the ceiling canopy in order.
 C. Attach one end of the fixture chain to the fixture body with one quick link. Lift the fixture and fixture chain up and attach the other end of the fixture chain onto the canopy chain loop with another quick link. The fixture will now hang safely.
 D. Feed the supply wires and ground wire through the canopy chain loop and nipple into the outlet box. Cut the wires leaving approximately 6" of wire extending from the outlet box.
 E. Go to Step 4 for wire connections and follow the directions.
 Return to Step F in this step when complete with Step 4.
 F. Raise the ceiling canopy and canopy lock ring up the fixture chain and over the canopy chain loop. Tighten the canopy lock ring onto the canopy chain loop until tight.




Figure 3

STEP 4 - Wire Connections
 A. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

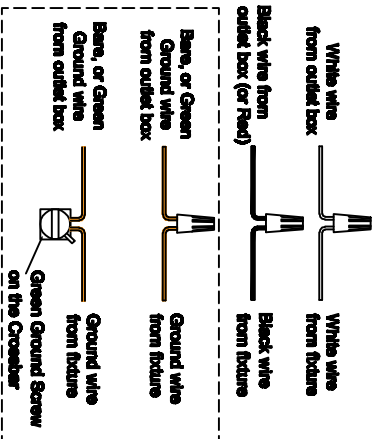


Figure 4

STEP 5 - Install Bulbs and Glass tube.
 A. Install bulbs into sockets and push snug into place.
 B. Install the glass tube on the lamp holder.
 C. Be careful that glass is fragile.

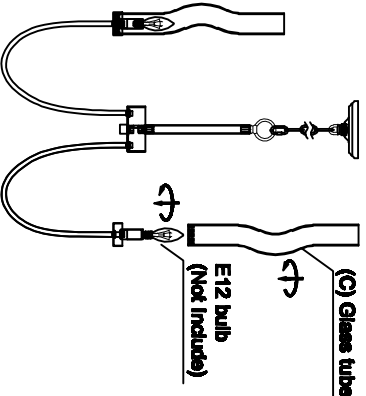


Figure 5