


Submitted Model No.: Specific Features:



▲ Designate proper finish suffix

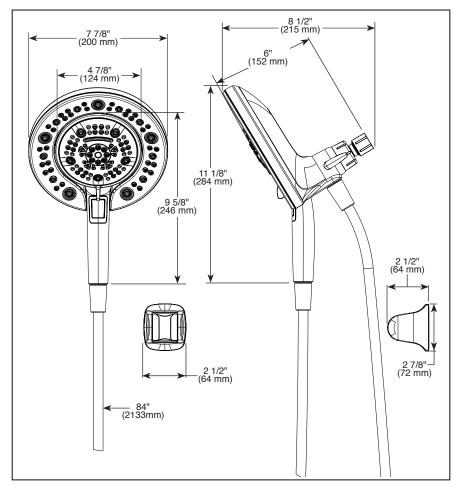

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do[®]



- 2-In-1 Shower
- 7-Setting Hand Shower
- Additional Docking Mount for Hand Shower

FEATURES:

- Touch-Clean[®] Nozzles
- MagnaTite[®] Docking

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa
- Max flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (75687D)
- Integrated hand shower docks securely into shower head when not in use
- 3-Way diverter allows for single or shared operation of shower head and hand shower
- Change hand shower spray modes with easy turn dial
- Pause hand shower flow with push button pause in handle – pause is a non-positive shut-off
- 84" (2133) stainless steel hose (Chrome, SN finishes)
- Ball connector swivel angle is 32° (16° per side)
- Fits standard 1/2"-14 NPT pipe fitting
- Additional docking mount for hand shower can swivel 35° forward to 5° backward
- Additional docking mount can be mounted by selfadhesive or screw

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
 EPA WaterSense[®] applies to 75687 only

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2021 Delta Faucet Company