# **Riff®**



# Rite-Temp® 2.5 gpm bath and shower faucet trim

K-TS27403-4

#### **Features**

- A single handle controls both on/off activation and temperature setting.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Antiscald protection.
- Includes faceplate with ADA-compliant metal level handle.
- Includes 6-1/16" (154 mm) diverter bath spout with slip-fit connection.
- Includes single-function 2.5 gpm (9.5 lpm) showerhead.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes shower arm and flange.
- Coordinates with other products in the Riff collection.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

 Requires Rite-Temp® pressure-balancing valve (sold separately).

#### **Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300 Series Rite-Temp® Valve Body Rough-ins K-8305 Series Rite-Temp® Cartridges

#### Adapters, Rough-in and Extension Kits

10350 Range: 3-1/2" (89 mm) - 4-1/4" (108 mm)

#### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Optional Products/Accessories**

K-10350 Deep rough-in kit

K-10351 Test cap for K-8300 Series valve bodies 1307346 Retro mixer cap for K-304 Rite-Temp valve

1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve







#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992


# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.



Rite-Temp® 2.5 gpm bath and shower faucet trim set

### K-TS27403-4

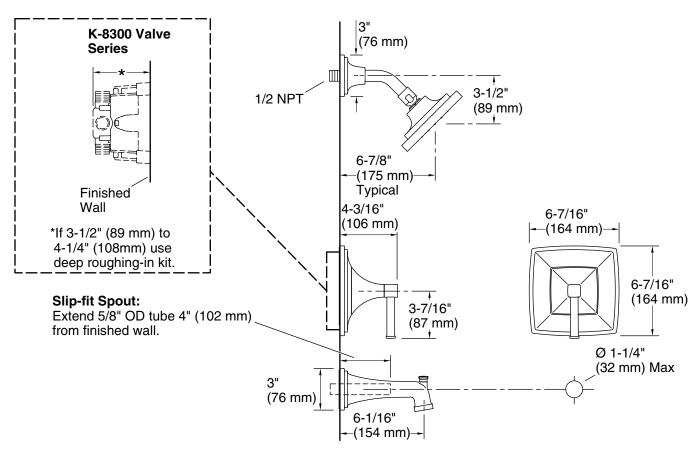

#### **Technical Information**

All product dimensions are nominal.

Drain included: No

Spout:

Spout reach: 6-1/16" (154 mm)

## **Showerhead/Body Spray:**

Rated maximum 2.5 gal/min (9.5 l/min)

flow:

Pressure: 45 psi (3.1 bar)

#### Notes

Install this product according to the installation instructions.

