

# Models 6018/6518

## PRO-FIT® 3660

Rectangular Whirlpool or Bathtub



### Features





- 59-3/4" x 35-3/4" x 21-1/4" Rectangular whirlpool or bathtub
- Six powerful ultra-swirl jets
- Dual air knobs for total jet control
- Limited One-Year Warranty
- Available in standard colors: white, almond, biscuit and bone



Model 6018  
(Shown with trim upgrade and Lift and Turn drain)



### Options

#### Lift and Turn Drain

Model #	Description		Model #	Description	
PF1320	Polished Chrome		SWAP00	Nailing flange kit	
PF1321	Everbrass (PVD)		SWP150	Factory installed nailing flange	
PF1322	Brushed Nickel		PF1325B	5' Removable apron	
PF1323	Oil Rubbed Bronze				

### Whirlpool Option

#### Metal Trim

Model #	Description		Model #	Description	
PF1335	Polished Chrome		SWP151	In-line Water Heater	
PF1336	Everbrass (PVD)				
PF1337	Brushed Nickel				
PF1338	Oil Rubbed Bronze				



**MADE IN USA**




# Models 6018/6518

## PRO-FIT® 3660

Rectangular Whirlpool or Bathtub




### Specifications

Model #	Description	Codes/Standards
6018	59-3/4" x 35-3/4" x 21-1/4" Rectangular whirlpool	  
6518	59-3/4" x 35-3/4" x 21-1/4" Rectangular bathtub	

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	6
Construction	Self-contained, pre-plumbed whirlpool bath mounted on a pre-leveled base	Water Capacity	32 gal. (min.) / 45 gal. (max.)
Pump Motor	Single speed, 120 volt, 60 HZ, 5.8 amp, premounted	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	120 volt, 15 AMP, GFCI protected circuit	Shipping Weight	whirlpool - 140 lbs. bathtub - 120 lbs.
On/Off Control	Air Switch	Warranty	Limited One Year

### Technical Information

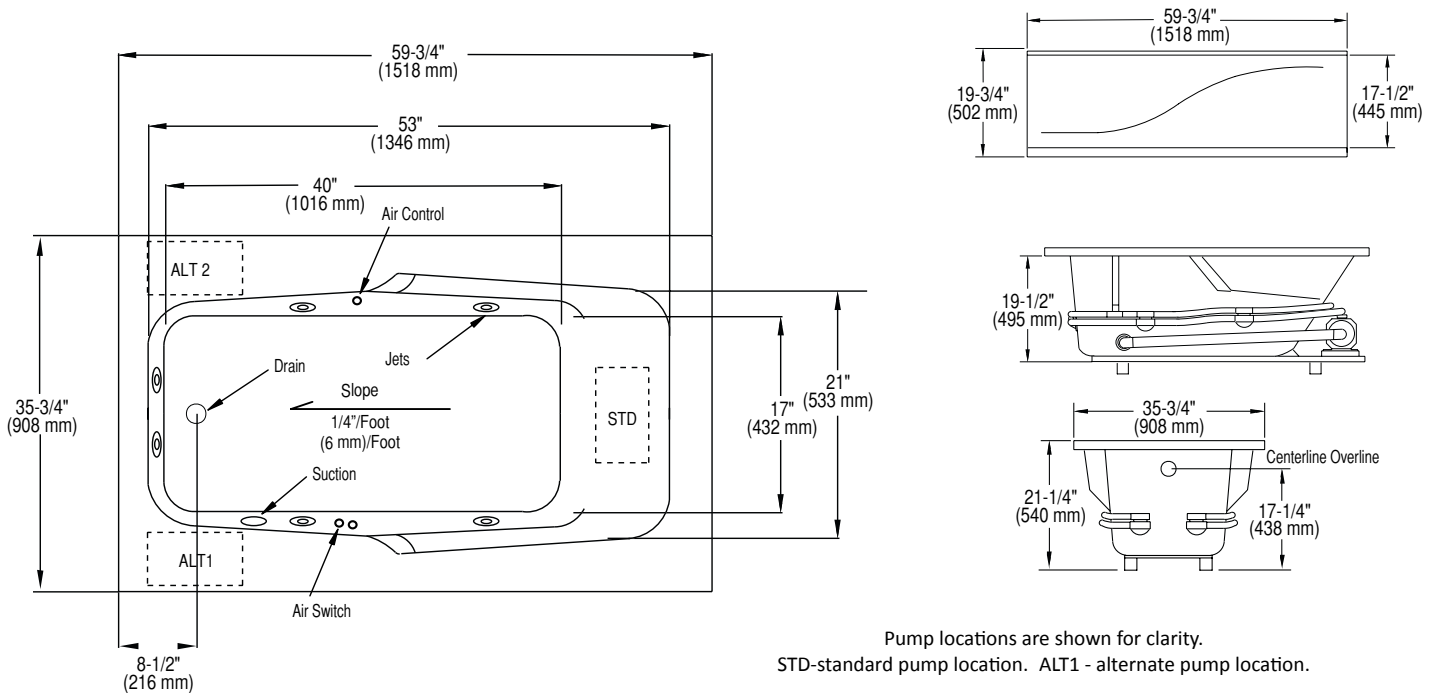

Pump locations are shown for clarity.  
 STD-standard pump location. ALT1 - alternate pump location.  
 Notes: If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

Measurements may vary 1/4" (+/-)

Install this product according to the installation guide.

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Please visit our website to view IAPMO certification information – [www.mansfieldplumbing.com](http://www.mansfieldplumbing.com)



**MADE IN USA**