

P730003 2-LGT LED LG DRUM

Ceiling mounted • Damp location listed



Description:

LED flush mount with white acrylic diffuser mounts to baked enamel ceiling pan. Twist on installation with a single locking thumb screw. UL approved for damp locations. Ceiling or wall mount. 2520 lumens, 90 lumens/watt, 3000K and 90CRI. ENERGY STAR and Title 24.

Specifications:

- White (-030) (Painted)
- Steel Construction
- White Acrylic diffuser
- Twist on installation.
- Wall or ceiling mount
- 2520 lumens, 90/lumens per watt
- 3000K color temperature, 90+ CRI
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	28w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	2520/90 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	36,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year warranty
Labels	ETL Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


P730003-030-30

Images:



Dimensions:

Diameter: 17"
Height: 4-1/8"

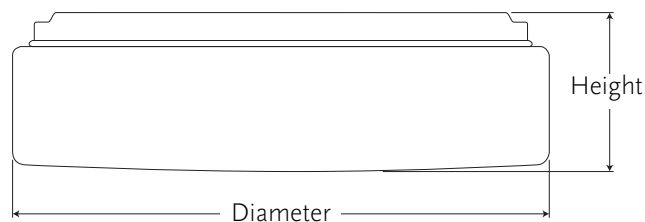

P730003-030-30

Dimming Notes:

P730003 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron Caseta Wireless

Lutron TGCL-153-PH

Lutron AYCL-153P

Lutron NTLV-600P

Lutron NAELV-601

Lutron N-600

Leviton 6674

Leviton AWSMT-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.